



TL03B90

PRODUCT DATA

Information issue: August 2026

Product configuration: TL03B90 | SINGLE COLOUR

TL03B90: Ø90 spotlight - 30W 4050lm - 2700K / 3000K / 4000K - CRI 90 - Black / White

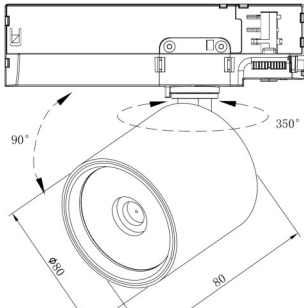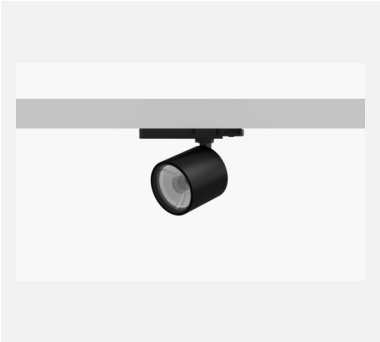

DIMENSIONS: Ø90 x 95 mm

Product code

TL03B90

Technical description

Adjustable spotlight for a compatible three-circuit electrified track. Single-colour LED, selectable in 2700K, 3000K or 4000K, CRI 90. 24 or 36 degree optical options. The optical assembly provides PC lens or aluminium reflector optical assembly. Cold-forged aluminium body with thermoplastic front trim, 350 degree rotation, 90 degree tilt and passive thermal management. The integrated driver is housed within the track adapter enclosure.

Installation

Compatible three-circuit electrified track

Colour	Weight (Kg)
Black / White	0.56 kg (560 g)

Mounting

Three-circuit track

CE	RoHS	IP20	Indoor use
----	------	------	------------


Technical data

lm system:	4050	CRI (minimum):	90
W system:	30.0	Colour temperature [K]:	2700 / 3000 / 4000
lm source:	4820	MacAdam Step:	3
W source:	26.4	Life time LED:	> 50,000h - L90 - B10 (Ta 25 C)
Luminous efficacy [lm/W]:	135 (115-145)	Lamp code:	LED
Emergency luminous flux:	0	Lamps / optical assembly:	1
Flux at 90 degree [lm]:	0	ZVEI Code:	LED
L.O.R. [%]:	84	Optical assemblies:	1
Beam angle:	24 / 36 degree options	Control:	Single colour, non-dimmable

Polar

Lux (36 degree model)

24 / 36 degree options (30W / 4050 lm preliminary model)

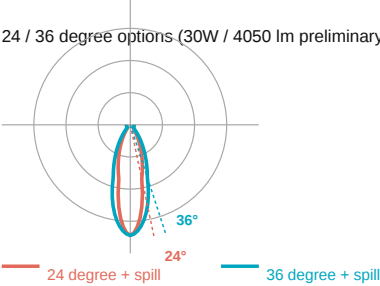

h	d	Em	Emax
2	1.3	1199	1770
4	2.6	300	442
6	3.9	133	197
8	5.2	75	111

24 / 36 degree preliminary optical model at 4050 lm. Not an IES test.