



TL05A65

PRODUCT DATA

Information issue: August 2026

Product configuration: TL05A65 | DUAL COLOUR

TL05A65: Ø65 spotlight - 15W 1260lm - 2700K-6000K - CRI 90 - Black / White

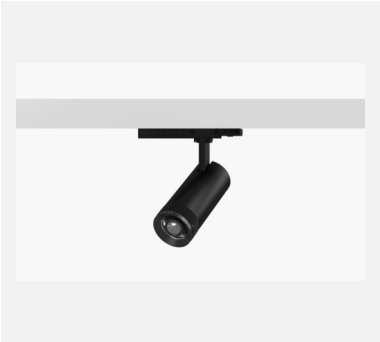

DIMENSIONS: Ø65 x 150 mm

Product code

TL05A65

Technical description

Adjustable spotlight for a compatible three-circuit or DALI electrified track. Dual-colour COB configuration from 2700K to 6000K, CRI 90. Zoomable beam from 15 to 55 degree. The optical assembly provides adjustable zoom optical assembly. Cold-forged aluminium body with thermoplastic front trim, 350 degree rotation, 90 degree tilt and passive thermal management. The integrated driver is housed within the track adapter enclosure.

Installation

Compatible three-circuit or DALI electrified track

Colour Weight (Kg)

Black / White 0.72 kg (720 g)

Mounting

Three-circuit track

CE RoHS IP20 Indoor use

Technical data

lm system:	1260	CRI (minimum):	90
W system:	15.0	Colour temperature [K]:	2700-6000
lm source:	1500	MacAdam Step:	3
W source:	13.2	Life time LED:	> 50,000h - L90 - B10 (Ta 25 C)
Luminous efficacy [lm/W]:	84 (80-110)	Lamp code:	LED
Emergency luminous flux:	0	Lamps / optical assembly:	1
Flux at 90 degree [lm]:	0	ZVEI Code:	LED
L.O.R. [%]:	84	Optical assemblies:	1
Beam angle:	15-55 degree zoomable	Control:	Dual colour, DALI-2 option

Polar

Lux (55 degree model)

Zoom beam range: 15-55 degree (15W / 1260 lm preliminary model)

	h	d	Em	Emax
	2	2.1	195	323
	4	4.2	49	81
	6	6.2	22	36
	8	8.3	12	20

15 degree min 15° 55 degree max

15-55 degree preliminary model with residual spill at 1260 lm. Not an IES test.